


- 1) WELDING CONFORMS TO CSA W59-1989 2) PLUMBNESS TOLERANCE: 10mm:100mm V TÓ A MAX OF 25mm H
- 3) PAINTED WITH RED OXIDE PRIMER
- 4) NORMALLY STOCKED IN 1.52 M TO 2.44 M LÉNGTHS
- 5) SEE DWG. NO. VBK-3 FOR OPERATING KEY

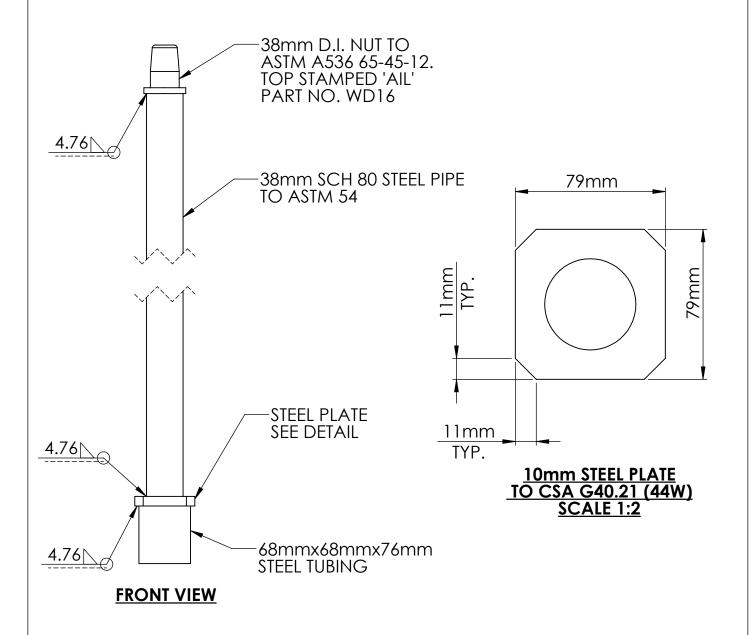

| | | NAME | DATE | | | |
|----------------------|---|------|------------|------------------|---------------------|------|
| | DRAWN | AS | JUNE 25/18 | • | | |
| | CHECKED | | | 7 | to describe a firm | |
| | DIMENSIONS AR | | | Industrial Group | | |
| | TOLERANCES: FRACTIONAL ± ANGULAR: MAC | | • | | | |
| do not scale drawing | TWO PLACE DECIMAL ± THREE PLACE DECIMAL ± | | | SIZE | DWG. NO. | REV. |
| Description | SCALE1:5 | SHE | ET 1 OF 1 | Α | Valve Spindle - CoW | |