



EMERGENCY LEAK CONTROL KITS™

UNIVERSAL SERIES – Kits AE and D

Universal kits are designed to plug hazardous material leaks in any type of low-pressure vessel. The kits contain everything needed to respond to leaks in tanks and drums. The wide variety of sealing devices and materials address surface holes of all shapes, as well as cracks and gashes. All bolts, back-up plates, and hardware manufactured from 304 stainless steel. Accompanying tools are available in standard or non-sparking versions.

Kits 'AE' and 'D' contain two toggle-bolt ball plugs, six toggle-bolt surface plugs, two T-bolt crack patches, five self tapping screw patches, nine assorted wooden plugs, Fix Stix™ Epoxy, Plug-N-Dike™ Plug Pattie, lead wool pack, hot/cold hose repair tape, sorbent pad, tubeless tire repair kit, 8" x 12" solid neoprene and 20" x 20" closed-cell foam gasketing material, steel drift pin, OSHA approved 200' roll of barricade tape, tools for installing all patches and heavy duty carrying case.



KIT AE – For Tanks, Vessels, Drums



KIT D – For Drums

Kit 'AE' contains items for larger holes, cracks and gashes in addition to the standard items listed above. These include one 8" x 12" stainless steel plate lined with 3/4" thick soft neoprene material and three T-bolts with preassembled wingnut washer combos. A second 8" x 12" stainless steel neoprene backed plate is included with hardwood cribbing ladder patch and two 22' heavy-duty nylon straps.



KIT C-2

EXTERNAL PIPE LEAK CONTROL KITS – Kits C-2 and C-3


Pipe Leak Control Kits are designed to quickly respond to leaks in straight runs of piping. Simply snap the clamp around the pipe, drop bolt head through open-slotted lug and tighten nuts. Versatile clamps respond to water, wastewater, fuel, chemical, air and gas leaks.

Repair clamps are made of corrosion resistant 304 stainless steel, lugs are made of rugged ductile iron and shop coated for added protection. Bolts are plated for longer life. Grade 304 rubber compound gasket offers superior resistance to oils, aromatic and aliphatic hydrocarbons, condensates, gasoline and natural gas.

All External Pipe Leak Control Kits include extra solid neoprene and closed-cell foam gasketing material for odd sized, out-of-round, and corroded pipe applications. Accompanying tools are available in standard or non-sparking versions. Kits are packaged in a heavy-duty carrying case.

SERIES 'C-2' contains ten assorted clamps for 1/2" through 4" diameter pipe, extra gasketing material and installation tools. Clamp sizes are 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3", 3 1/2", 4".

SERIES 'C-3' contains three large clamps for 5", 6" and 8" diameter pipe, extra gasketing material and installation tools. Clamp sizes are 5", 6" and 8".

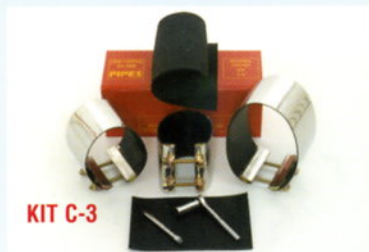

KIT C-3

PIPE PLUGGER KIT – KIT C-1

The Pipe Plugger Kit is designed to quickly plug open-ended pipes. Kit allows you to instantly plug knocked-off pipes carrying water, fuel, chemicals and gas. Great for knocked-off gas meters and tank truck discharge valves. 1" to 5" sizes have pressure relief vents to help get the plugs seated under pressure. Pressure relief vents on 1 1/2" through 5" plugs can connect to enclosed valve and discharge hose. This enables fluid or gas to be rerouted to another line, discharged to a recovery vessel or flared. The Pipe Plugger Kit can also

be used for drain line cleaning and nitrogen purging operations.

SERIES 'C-1' contains ten stainless steel pipe plugs, wooden plug, valve and discharge hose set, all necessary tools for installation and heavy-duty carrying case. Plug sizes are 3/4", 1", 1 1/4", 1 1/2", 1 3/4", 2", 2 1/2", 3", 4".

A separate 5" 'C-1' plug is also available.



KIT C-1



KIT F

THE ROLL-OVER KIT – Kit F

The Roll-over Kit is designed to patch a large hole, crack, or gash in a large vessel or tank. The kit has a patch that conforms to the curvature of the vessel. The patch uses a variety of T-bolts to support itself directly to the hole. The leak is then sealed by tightening the compression bolts around the frame, conforming the patch to the vessel.

Series 'F' contains one 3/4" neoprene gasketed stainless steel patch measuring 13" x 23". One stainless steel support frame with compression bolts, three stainless steel T-bolts with preassembled wingnut washer combos, all necessary tools and heavy-duty carrying case.